



PHASE 1
FROM DRAWING
TO SKELETON INSTALL



PHASE 2
FROM SKELETON INSTALL
TO COMPLETION

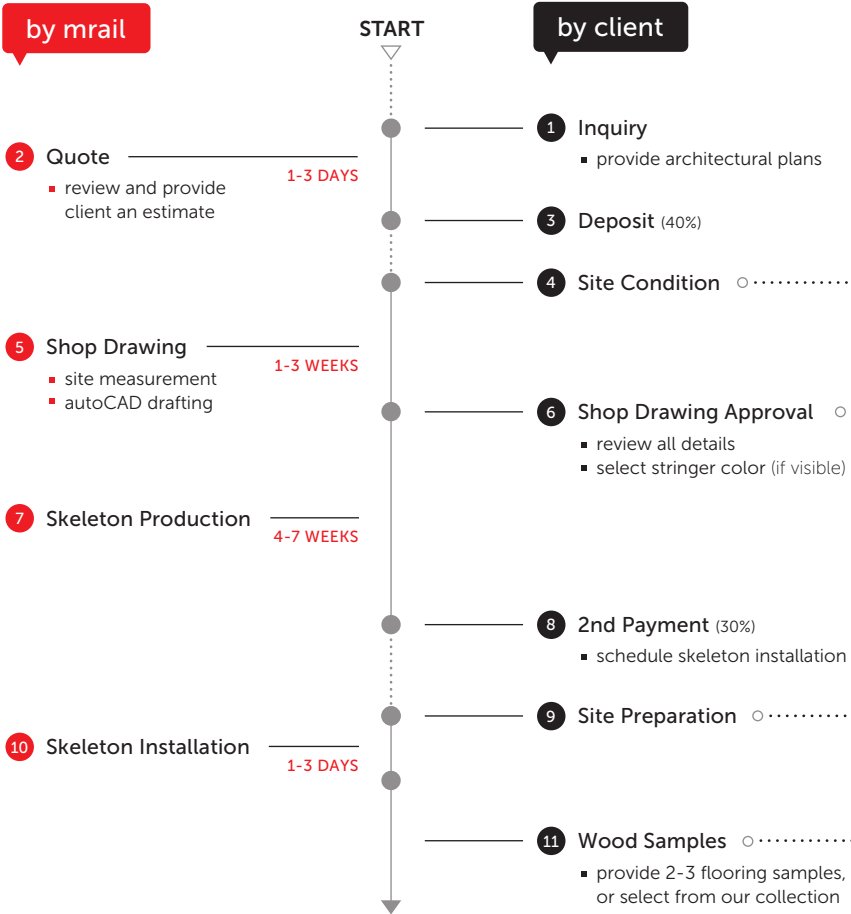

additional notes
for builder

- **notify mrail** when stair openings are ready for working measurements
- provide info regarding thickness of future finishing materials in the stair area
- confirm floor to floor height measurements, as we only allow 1/4" of discrepancy, in order to maintain the same for each riser.
- plan ahead for mrail's hidden glass hardware (if any), as they are side mounted to rough structure
- once the shop drawing is approved, no changes to the staircase area are permitted without mrail's consent
- build additional support as per shop drawing, for example:
 - create inner wall bearing connection between walls with double 2x6" header (jack studs fastened to wall studs)
 - add blocking for glass hardware or handrail's wall brackets
- enclose the house (roof and windows are installed)
- ensure that no finishing materials are installed in stair area
- remove temporary staircase prior to skeleton install
- the stair skeleton can be adapted (by others) for construction use, for example, installation of temporary guards (can be fastened to the threaded holes for glass hardware)
- if wood finish matching is required, consult mrail before floor purchase, as some finishes cannot be replicated in shop condition
- wood finish matching is free of charge, unless the requested finish requires special techniques (e.g. solid paint, antique, glazing...)
- mrail will do our due diligence to match the wood finish, but cannot guarantee a 100% match

- **notify mrail** 6-10 weeks before occupancy date
- walls are finished in staircase area
- flooring and fascia depends on scenario A or B (see below):



- (A) Hidden Gallery Glass Hardware**
- floor, nosing, and fascia are finished **after** gallery glass



- (B) Visible Gallery Glass Hardware**
- floor, nosing, and fascia are finished **before** gallery glass

- ensure moisture control is on and interior air quality is adequate for wood installation
- all finishes have been done as per approved drawing
- on the day of wood installation, stairs cannot be used

! NOTE: This timeline provides a general guideline.